

电磁阀 /Solenoid Valve

2

型号注释 /Note for type:

2L	170	15	AC110V
↓	↓	↓	↓
系 列 /Series:	流量孔径:	接管口径:	线圈电压:
2L: 二位二口电磁阀	Port diameter:	Port size:	Coil voltage:
2L: 2 position 2 way	170	15:G1/2"	DC12V
Solenoid valve	170	20:G3/4"	DC24V
	200	25:G1"	AC24V 50/60Hz
	300	35:G1 1/4"	AC110V 50/60Hz
	300	40:G1 1/2"	AC220V 50/60Hz
	500	50:G2"	AC380V 50/60Hz




气
动
控
制
阀

技术参数 /Specification:

型 号/Type	2L170-15	2L170-20	2L200-25	2L300-35	2L300-40	2L500-50
接管口径 /Port size (G)	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
工作介质 /Fluid	压缩空气、水、蒸汽 /Compressed Air, Water, Steam					
工作压力范围 /Operating pressure range (Mpa)	0.25~1.5					
使用温度范围 /Ambient temperature (°C)	-5~180					

外形尺寸 /Dimension(mm):

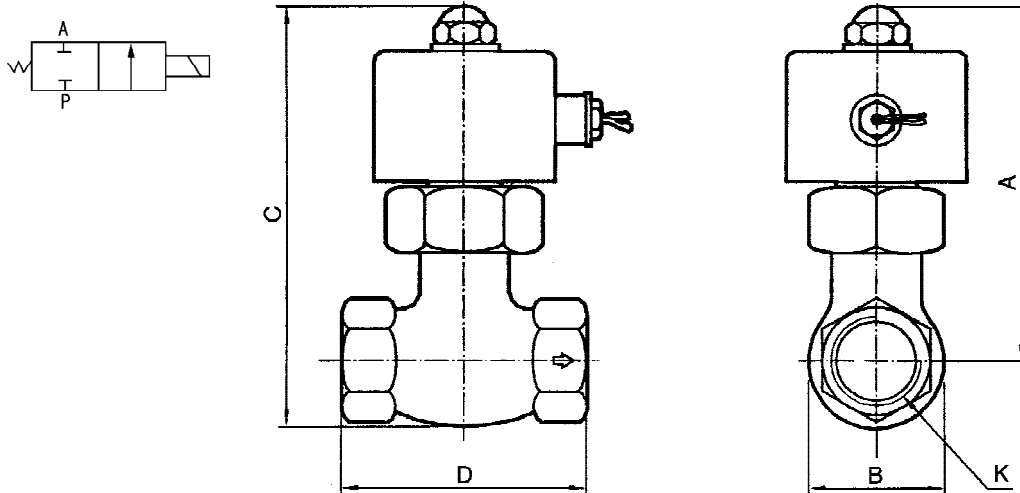

符号 /symbol	A	B	C	D	K
型号 /type					
2L170-15	125	42	146	82	G 1/2"
2L170-20	125	42	146	82	G 3/4"
2L200-25	136	52	162	90.5	G 1"
2L300-35	148	74	185	111	G 1 1/4"
2L300-40	147	74	183	111	G 1 1/2"
2L500-50	175	86	223	163	G 2"